


## SWITCH-8P-U-V2

Unmanaged Ethernet  
8 PORT POE SWITCH  
Plug-n-play connectivity

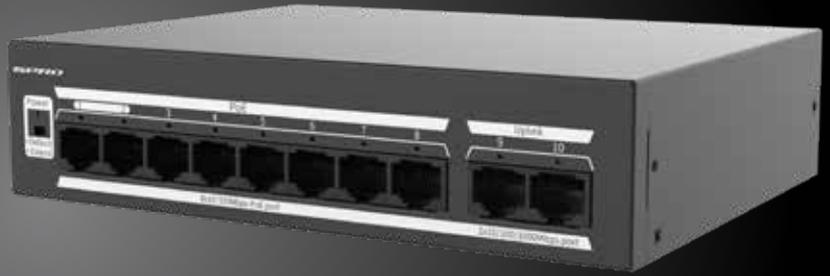

250  
metres

POE Transmission

130  
watts

Power Budget



Plug & Play



Metal Case



2 Uplink Ports

### Key Features:

- Multiple working modes to address your business needs: Default (Normal mode), EXTEND (Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimisation
- All metal housing, safe and reliable

### Hardware

<b>Model No.</b>	SWITCH-8P-U-V2
<b>Ports Type</b>	8×100Mbps network ports+2×1000Mbps ports, including 8 PoE ports
<b>Standards</b>	IEEE802.3, IEEE802.3u, IEEE802.3az, IEEE802.3x, IEEE802.3af, IEEE802.3at
<b>Switching Capacity</b>	5.6 Gbps
<b>Forwarding Performance</b>	4.17Mpps
<b>Packet Buffer</b>	2 M bit
<b>MAC</b>	4K
<b>Dimensions (WxDxH)</b>	169*132*40mm
<b>Weight</b>	0.84KG
<b>Power Supply</b>	AC: 100 to 240V, 50/60Hz
<b>PoE Standard</b>	IEEE 802.3 at, IEEE 802.3af
<b>Max. PoE Power</b>	Max capacity:120W Max capacity for single port: 30W
<b>PoE Mode</b>	ModeA (1236), ModeB (4578)

<b>Working Mode</b>	Default (Normal mode) : All ports can communicate with each other, EXTEND (Surveillance mode): Transmission distance up to 250 metres
<b>Operating Temperature</b>	0°C to 40°C (32°F to 104°F)
<b>Operating Humidity</b>	10%~90% (noncondensing)
<b>Indicator</b>	Power: Off: Abnormal power Input Green: Normal power Input Yellow: The total PoE power is higher than 85% of the total power of the device No PoE Indicator No PoE-Max Indicator LINK/ACT Off: No link Steady on Linked Flashing: Transmitting data
<b>Cooling Fans</b>	0